




| TOLERANCE | 1 | 2 | M | ANGLE | SYMBOL | DATE | REVISION |
|-----------|-------|------|------|-------|--------|------|----------|
| 0.5 ~ 6 | ±0.01 | ±0.1 | ±0.2 | ±0.5° | ∅ | | |
| 6 ~ 30 | ±0.1 | ±0.2 | ±0.3 | ±1° | ∇ | | |
| 30 ~ 120 | ±0.15 | ±0.3 | ±0.5 | ±1.5° | ∇ | | |
| 120 ~ | ±0.2 | ±0.5 | ±1.0 | | | | |

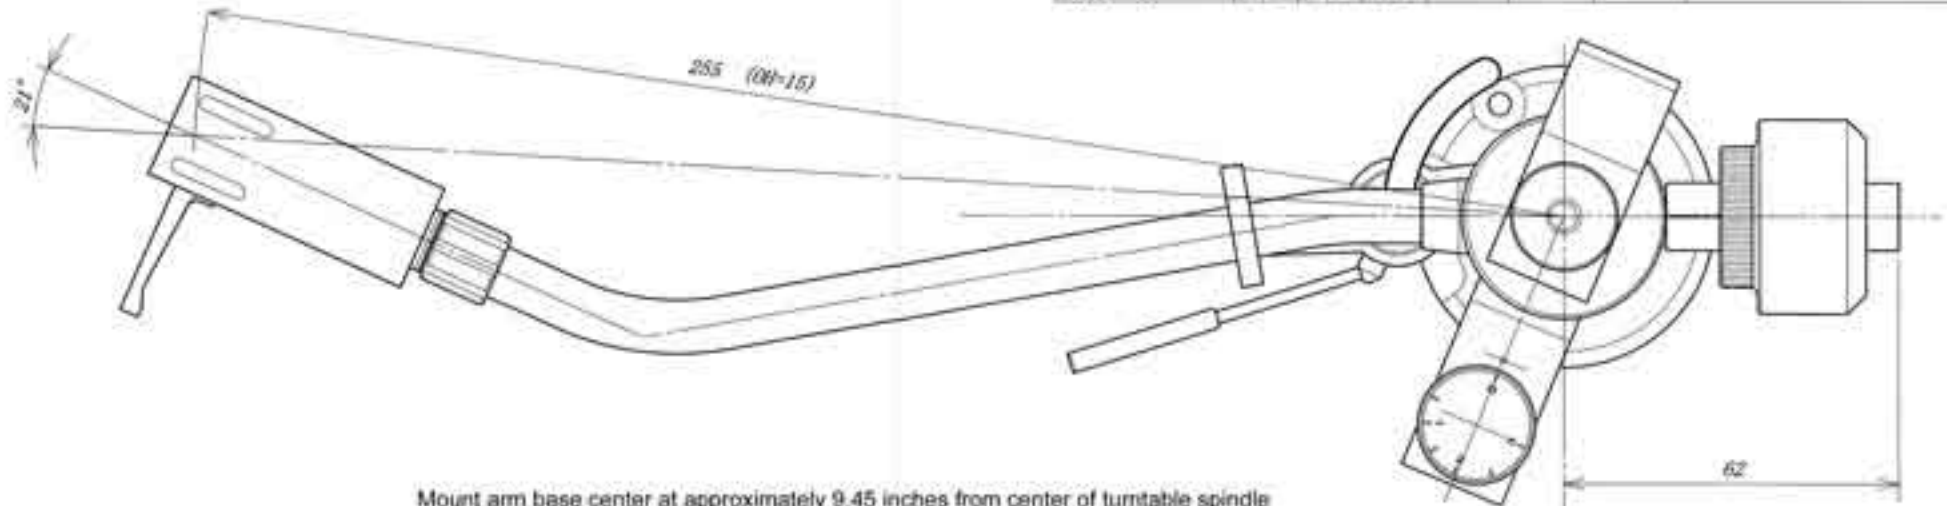

Mount arm base center at approximately 9.45 inches from center of turntable spindle

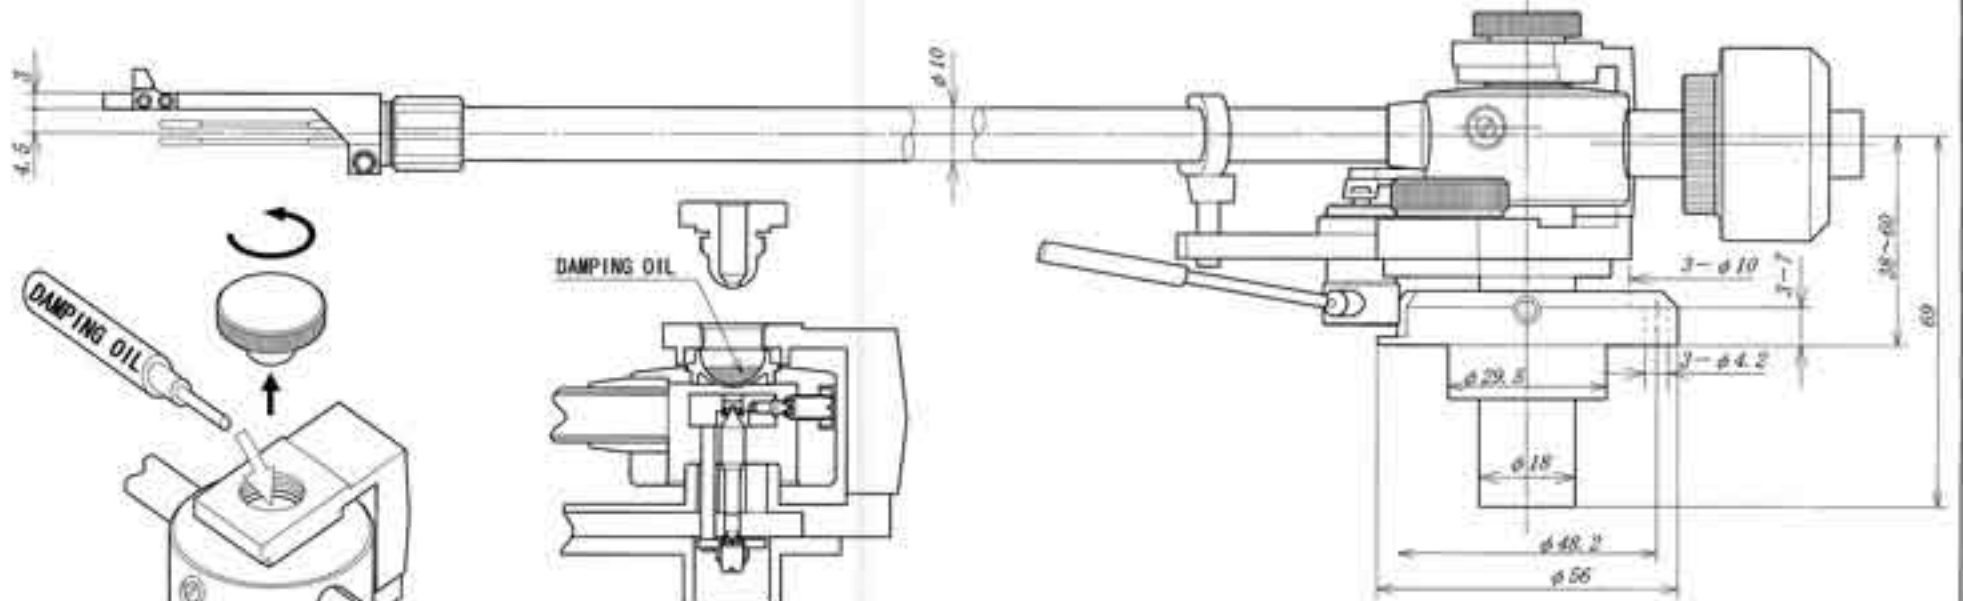

Unscrew cap at top of tonearm, and pour silicon damping oil into reservoir

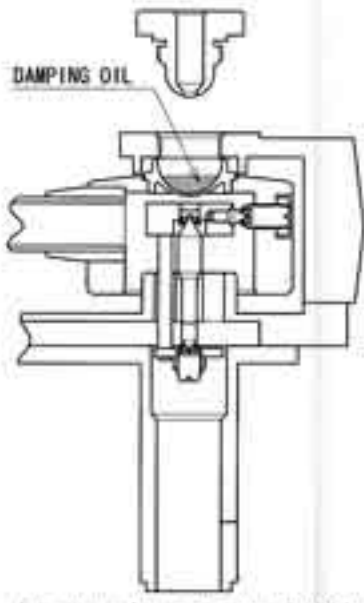

Fill reservoir cup to approximately half full level as illustrated above

| No. | QTY | DRAWING No. | PARTS NAME | MATERIAL | FINISH | NOTES |
|----------------------|-----|-------------|------------------------|----------------------|--------|-------|
| MATERIAL | | | Magnesium and Aluminum | PARTS NAME | | |
| FINISH | | | | S260 MARK II TONEARM | | |
| DESIGNED | | | APPROVED | DRAWING No. | | |
| DRAWN | | | CHECKED | P260IIA | | |
| JUNE 20, 2008 | | | | | | |
| 3RD ANGLE PROJECTION | | | REK-O-KUT | | | |
| UNIT: mm SCALE 1 : 1 | | | | | | |