



REMOVAL OF THE CVS MOTOR

1) Identify all cable hold-downs (tie-wraps) and plugs associated with the motor.

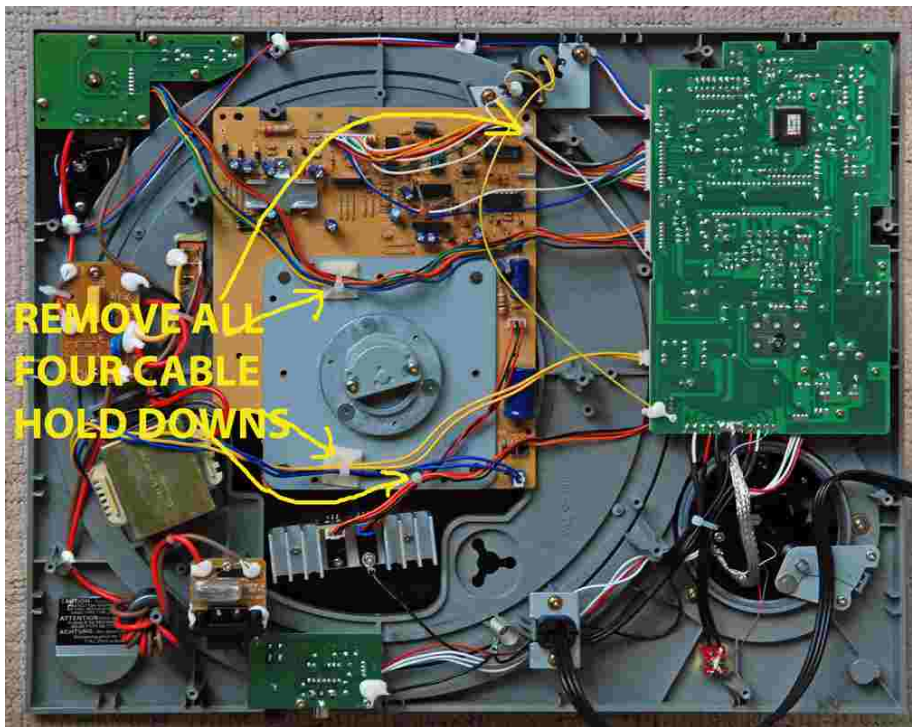

2) Cut the cable hold-downs carefully. Do not cut the wires!

3) Pull out all five of the connectors that restrain the motor.

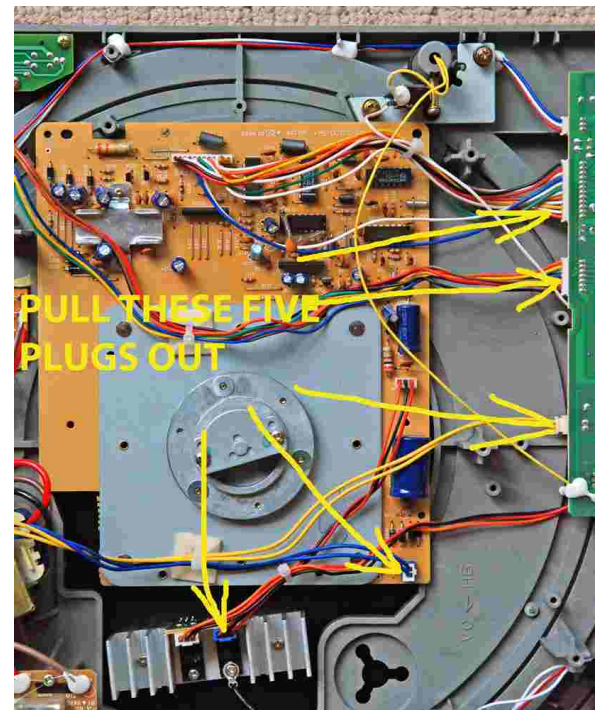

4) From the topside, remove the 4, Black Phillips head screws holding the motor in place.

5) Lift the motor straight out of the bottom.

6) To replace the motor, perform the reverse, but no need to replace cable hold-downs.